


ASSEMBLY AND OPERATION INSTRUCTIONS

Woodstock Moon Fountain™

Item # 31502

Completely unpack all the fountain parts. You should have a base, upper tier, round acrylic disc, clear water supply tube with LED light and pump / transformer unit.

- Place your fountain base on a hard, level surface. Make sure it is a surface that will not be damaged by moisture. The light effect will work best if the fountain is placed near a wall.
- Fill the base about 2/3 full with distilled water.
- Set the flow control on the front of the pump to the highest setting (+). You can adjust the rate of light flicker by changing the flow control.
- Insert the LED into the hole in the center of the upper tier. Make sure to pass the power cord down through the top first and seat it in the groove. Connect the power cord and the clear water supply tube to the pump.
- Center the upper tier onto the base with the spout facing forward, toward the viewing area, making sure the wires go through the slot and over the back of the base.
- Insert the tabs on the round disc into the slot just behind the spout on the basin.
- Plug the transformer into any GFCI outlet that has been installed in accordance with state and local building codes. (*Water may surge upon startup.*)
- Make sure the power cord hangs below the outlet so that it creates a drip loop. This will prevent water from accidentally running down the power cord into the outlet.
- Check the water level every couple of days and refill as necessary. During operation the pump must be completely covered with water.
- If you plan to be away for more than a couple of days, unplug your fountain.
- For more information please go to our website (www.chimes.com), or email us at woodstock@chimes.com.

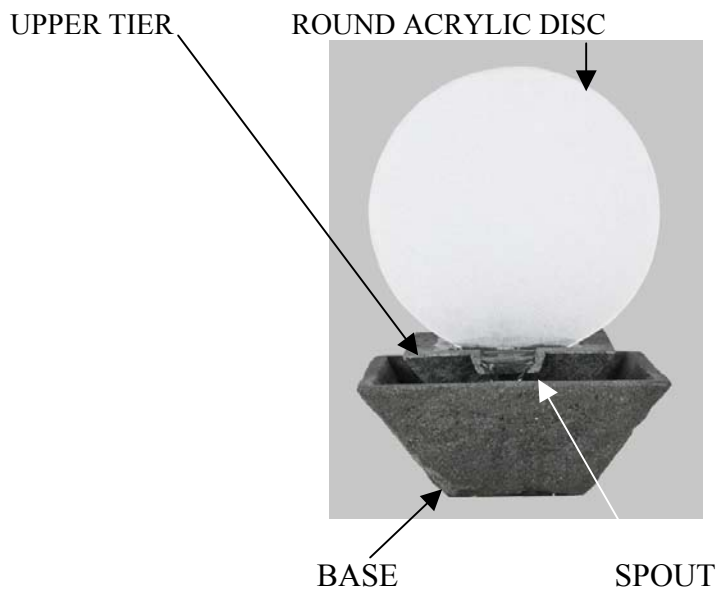

Woodstock Chimes®
Shokan, NY 12481-5124
woodstock@chimes.com
www.chimes.com

©2008 WPI
File # 2076INS030608